

MINIMUM 2 X 8 STUDS MINIMUM MINIMUM 11.75 5/8" DRYWALL **OPENING OPENING** TYPE X LINE ENTIRE CAVITY (5 SIDES) FIXTURE WHIP w/ CONNECTORS CONNECTION MADE AT JUNCTION BOX 5/8" DRYWALL TYPE X SUBFLOOR JUNCTION BOX ON TOP OR SIDE 000 MIN. 2 x 8 ADJUSTABLE TABS 0000000 SURFACE VIEW 70.25

INSTALLATION TYPES

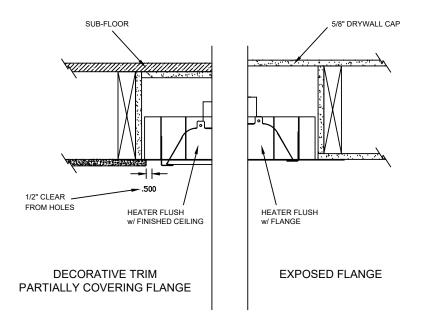

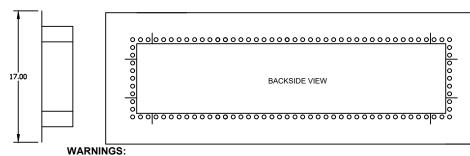

- This frame is ONLY to be used on a flat non-sloped ceiling.
- Heater must face straight down.
- Frame and Heater cannot be installed on a pitched angle.
- Junction box must be installed outside of drywall pocket.

NOTES:

- Heater suspends (Gravity) by resting on adjustable tabs in flush mount fixture.
- Mounting holes on Surface Flange to be determined and drilled by Contractor/Installer.
- Supplied with Hi-Temp Fixture Whip and Hi-Temp Ceramic Wire Nuts.
- Note: Please contact factory for longer length whips available for purchase.
- Use Licensed Electrician ONLY
- Coil excess flex into heater cavity.

